## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's address: Lucide NV, Bisschoppenhoflaan 145, 2100 Deurne, BE

Model identifier: 18650-03-31


_	•			
Typa	Λt	liaht	sourc	Δ.
IVDE	OI.	IIGIIL	<b>3</b> Uui C	c.

ing control

"							
Lighting technology used:		LED	Non-directional or directional:	NDLS			
Light source cap	Light source cap-type						
(or other electric interface)		LED clips lamp					
Mains or non-mains:		NMLS	Connected light source (CLS):	No			
Colour-tuneable light source:		No	Envelope:	-			
High luminance	High luminance light source:						
Anti-glare shield	Anti-glare shield:		Dimmable:	Yes			
Product parameters							
Parameter		Value	Parameter	Value			
General product parameters:							
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		4	Energy efficiency class	G			
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000			
On-mode power (P <sub>on</sub> ), expressed in W		4,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00			
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80			
Outer dimen-	Height	485	Spectral power dis-	See image			
sions without	Width	112	tribution in the	in last page			
separate con- trol gear, light-	Depth	112	range 250 nm to 800 nm, at full-load				

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,438			
		nates (x and y)	0,404			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	14	Survival factor	0,90			
the lumen maintenance factor	0,96					

(a)'-': not applicable; (b)'-': not applicable;

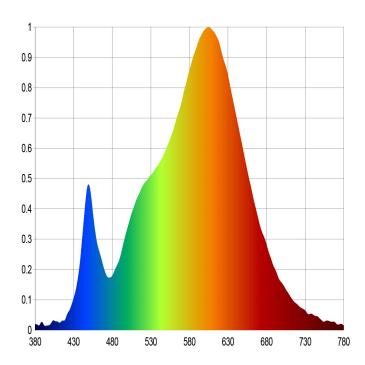

## Model placed on the Union market from 02/04/2013



**EPREL registration number:** 846060 https://eprel.ec.europa.eu/qr/846060

Supplier: Lucide N.V. (Manufacturer) Website: www.lucide.be

**Customer care service:** 

Name: Lucide NV Website:

Email: info@lucide.com Phone: +32 3 366 22 04

Address:

Bisschoppenhoflaan 145

2100 Deurne Belgium